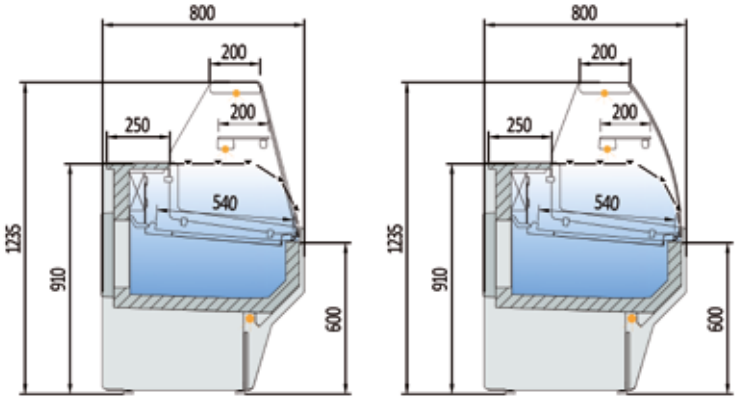


EVAPORADOR ESTÁTICO - *STATIC EVAPORATOR*

CVE-8-10-R	2.331 €	CVE-8-10-C	2.517 €
CVE-8-13-R	2.580 €	CVE-8-13-C	2.762 €
CVE-8-15-R	2.780 €	CVE-8-15-C	3.073 €
CVE-8-20-R	3.428 €	CVE-8-20-C	3.653 €
CVE-8-25-R	4.069 €	CVE-8-25-C	4.433 €
CVE-8-30-R	4.884 €	CVE-8-30-C	5.236 €

mod.	largo length (mm)	exposición display RSA (m^2)	exposición display TDA (m^2) R	exposición display TDA (m^2) C	reserva cold storge (L)	puertas doors (uds)	potencia frig. frig. power (W)	consumo consumption (W)	refrigerante refrigerant
CVE-8-10	1025	0,68	0,48	0,48	246	1	565	830	R-290
CVE-8-13	1265	0,85	0,6	0,6	309	2	572	891	R-290
CVE-8-15	1505	1,01	0,72	0,72	373	2	781	1011	R-290
CVE-8-20	1985	1,35	0,95	0,95	499	3	949	1099	R-290
CVE-8-25	2465	1,69	1,19	1,19	626	4	1284	1298	R-290
CVE-8-30	2945	2,03	1,43	1,43	752	4	1284	1322	R-290

características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications whitout prior notice

- Exterior e interior en chapa de acero plastificada
- Plano exposición y encimera en acero inox AISI-304
- Bandejas plano de exposición lisas
- Costados de 30 mm en ABS inyectado excepto acabado madera
- Perfilería en aluminio anodizado
- Paragolpes en la parte delantera
- Cristal frontal securizado, abatible
- Estante de cristal intermedio con iluminación, no refrigerado
- Iluminación LED 4000K estándar: frente bajo, encimera y estante
- Opción LED 3000K (luz cálida) o RED FRESH, al mismo precio
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m^3, cero efectos ODP y GWP
- Reserva refrigerada con puertas, hueco 440x270
- Enchufe auxiliar con capacidad máxima de carga de 500W
- **Evaporador estático**, con tratamiento EPOXY anti-corrosión
- Chasis en acero acabado epoxi
- Condensación ventilada, evaporación automática de serie (sólo con motor incorporado)
- Control electrónico de temperatura
- Descarche automático, opcional eléctrico en evaporador estático
- Clase climática 3 (25°C 60% HR)
- Temperatura de funcionamiento (0/+6°C)
- Tensión de trabajo monofásica 220V 50Hz, 115V 60Hz o 220V 60 Hz (Consultar)

- *Interior and exterior finish in plastic coated steel*
- *Display area and counter in stainless steel AISI-304*
- *Smooth deck for display area*
- *30 mm sides in injected ABS, excepd wood decor*
- *Anodised aluminium profiles*
- *Front rubber bumper*
- *Secured and hinged front glass*
- *Intermediate glass shelf with lighting. Non-refrigerated*
- *Standard LED 4000K lighting: front exterior, top worktop and shelf*
- *Optional 3000K LED (soft light) or Fresh red, same price*
- *40 Kg/m^3 density polyurethane insulation, zero ODP and GWP*
- *Refrigerated under storage with doors 440x270*
- *Auxiliary power socket with a maximum load capacity of 500W*
- ***Static evaporator,** with anticorrosion EPOXY treated as standard*
- *Chassis in epoxy-coated steel*
- *Ventilated condensation and automatic evaporation as standard (only models with condenser unit)*
- *Electronic temperature controller*
- *Automatic defrost, electric option with static evaporator*
- *Climate class 3 (25°C 60% RH)*
- *Operating temperature (0/+6°C)*
- *Single-phase operating voltage 220V 50Hz, 115V 60Hz or 220V 60Hz (Consult)*

Modelo	Decoración frontal*	Decoración total*	Decoración total alto brillo	Cierre Plexi	Cierre cortina	Iluminación led extra	Neutra	PreInstalación
Model	*Front decor**	*Total decor**	*Total decor high gloss*	*Plexi slide*	*Night blind*	*Extra led lighting*	*Neutral*	***Remote Unit***
CV-10	153 €	503 €	647 €	125 €	188 €	61 €	-427 €	-125 €
CV-13	165 €	515 €	660 €	184 €	260 €	84 €	-479 €	-141 €
CV-15	179 €	526 €	673 €	214 €	314 €	99 €	-531 €	-151 €
CV-20	191 €	534 €	686 €	268 €	345 €	119 €	-640 €	-188 €
CV-25	201 €	541 €	701 €	356 €	405 €	158 €	-906 €	-214 €
CV-30	213 €	549 €	728 €	422 €	623 €	170 €	-1.036 €	-266 €

*Consultar precios acabados madera



CVE-8-20-R



CVE-8-20-C



plano de exposición
display area



perfileria anodizada
anodized profiles



estante superior NO refrigerado
not refrigerated shelf